

Fig. 4: Hr and SMNR dependence on NiNb thickness of the media with surface-oxidized NiNb sealing layers (NiNbOx) and non-oxidized NiNb sealing layers.

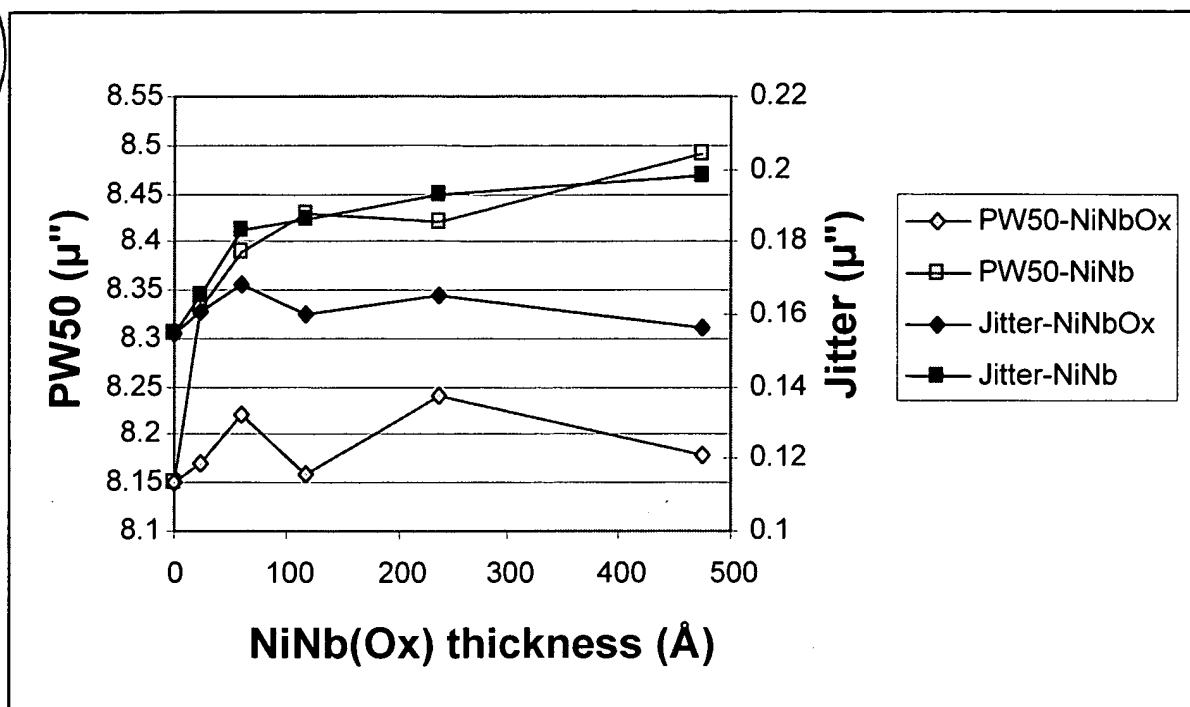


Fig. 5: PW₅₀ and jitter dependence on NiNb thickness of the media with surface-oxidized NiNb sealing layers (NiNbOx) and non-oxidized NiNb sealing layers.